


Lugged Butterfly Valve to suit AS2129 Table E Flanges

Lugged Butterfly Valve with Stainless Steel Disc													
CODE		SIZE IMPERIAL	H1	H2	H3	D	L	K	E	F	4-D1	N-D2	APPR OX KG/PC.
NBR	EPDM												
VWLG50	VWLGE50	2	80	161	31.8	114	42.04	11	70	14.1	10	4-M16	4.73
VWLG65	VWLGE65	2 1/2	89	175	31.8	127	44.68	11	70	14.1	10	4-M16	5.28
VWLG80	VWLGE80	3	95	181	31.8	146	45.21	11	70	14.1	10	4-M16	5.42
VWLG94	VWLGE94	4	114	200	31.8	178	52	14	70	18.1	10	8-M16	8.84
VWLG95	VWLGE95	5	127	213	31.8	210	54.36	17	70	22.1	10	8-M16	11.06
VWLG96	VWLGE96	6	139	226	31.8	235	55.7	17	70	22.1	10	8-M20	13.01
VWLG98	VWLGE98	8	175	260	35.5	292	60.1	17	102	22.1	12	8-M20	20.01
VWLGX25	VWLGEX25	10	203	292	35.5	356	65.63	22	102	28.2	12	12-M20	29
VWLGX30	VWLGEX30	12	242	337	35.5	406	76.5	22	102	28.2	12	12-M24	44

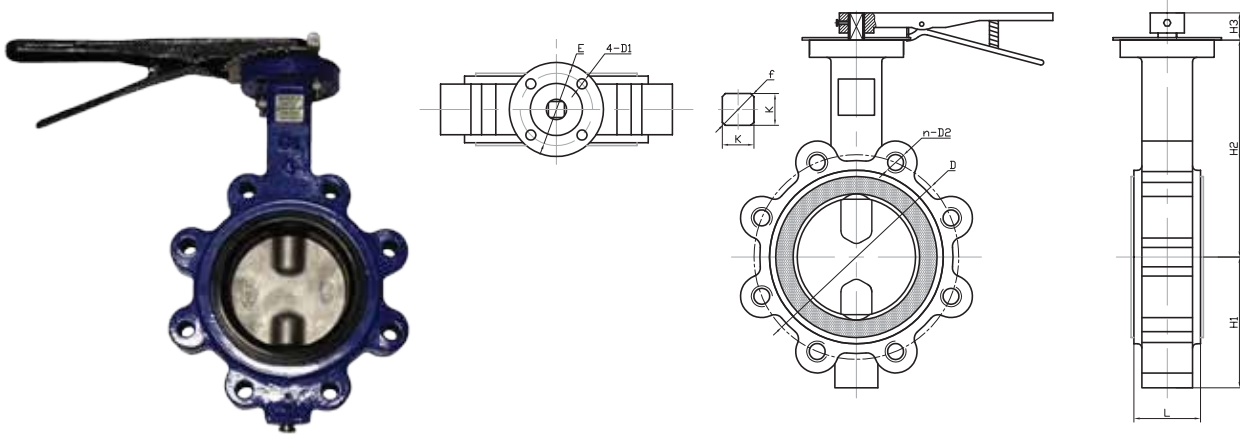

Materials List	
PART	MATERIAL
Body	Ductile Iron
Handle	Ductile Iron
Stem	SS416
Hub Shaft	CF8M
Bushing	P.T.F.E.
O-Ring	NBR

Specifications	
Cold Working Pressure (50-300mm)	1600kPa
Cold Working Pressure (350-600mm)	1000kPa
Top Flange	ISO 5211