


*** Recommended for Vertical Service – Only**

Pressures: 2100 kPa CWP
Steam: 1200 kPa @ 200°C

Standards: Dezincification Resistant
BS 5154: Globe Stop & Check Valves*
AS 3855: Materials suitable for Potable Water Service

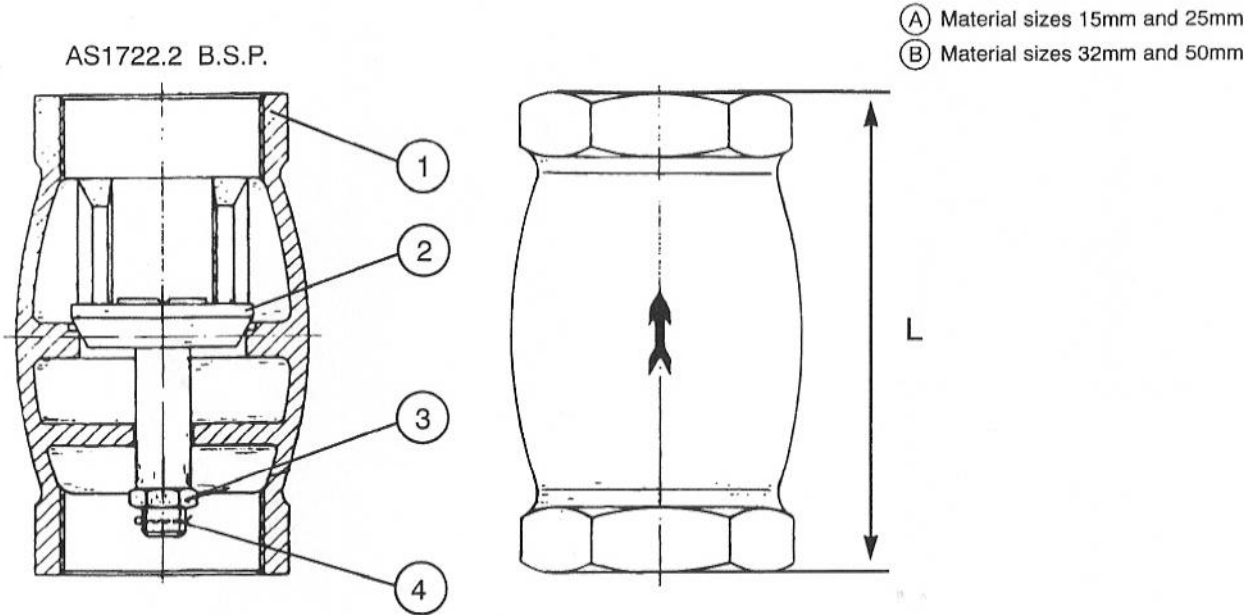

Optional:

Fig No T4AS available
fitted with Stainless Steel Spring

Dimensions

Size mm	8	10	15	20	25	32	40	50	65	80	100
L	•	•	54	60	73	82	98	140	•	•	•
H											
D											
Wt/kgs	•	•	0.2	0.25	0.4	0.75	1.0	2.5	•	•	•

*Valve in review
for AS1628-1994
Copper Alloy Valves

ITEM	DESCRIPTION	MAT'L	STANDARD
4	PIN	BRASS	
3	NUT	BRASS	
2	DISC – STEM (A)	DR BRASS	AS1567-352
2	DISC – STEM (B)	GUNMETAL BRONZE	AS1565 C83600M
1	BODY	GUNMETAL BRONZE	AS1565 C83600M



PROMET VALVES AUSTRALIA
1A Green Road Woodville West SA 5011
www.prometvalves.com promet@prometvalves.com
T: 08 8268 1777 ABN 47096 425 697 F: 08 8268 1711

FIG No
T4A

BRONZE VERTICAL CHECK VALVE SCREWED
CLASS 21
PN 20