


- Options:**
- Bronze Handwheels ①
 - Open-Shut Indicators ②
 - Locking Devices ③

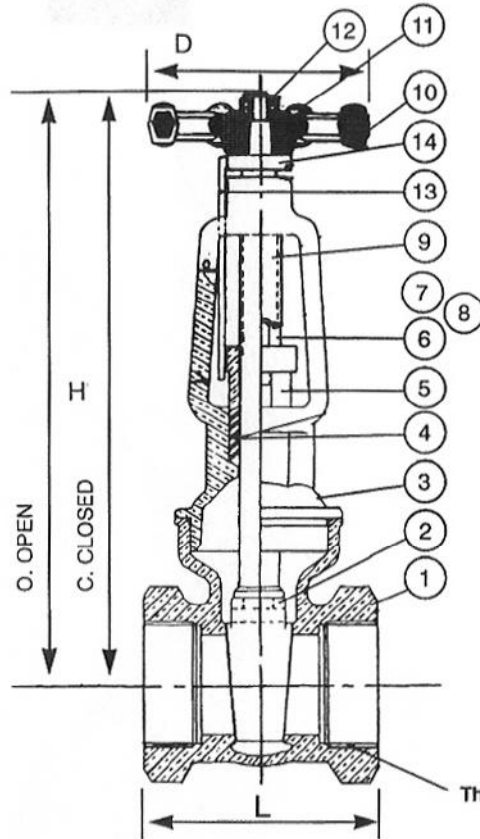

Dimensions

Size mm	8	10	15	20	25	32	40	50	65	80	100
L	•	•	60	60	66	76	90	98	114	138	178
H %	•	•	135 / 138	155 / 152	203 / 175	238 / 200	263 / 224	319 / 264	400 / 324	444 / 365	559 / 450
D	•	•	65	65	90	90	90	120	150	150	190
Wt/kgs	•	•	1.2	1.3	1.8	2.1	3.1	5.0	9.5	12.3	31.2

■ **Pressures:** 3500 kPa CWP
Maximum Working Pressure @ 100°C

■ **Standards:** Dezincification Resistant
AS 1628 – 1994: Copper Alloy Valves
AS 3855: Materials to suit
Potable Water Service

ITEM	DESCRIPTION	MAT'L	STANDARD
14	INDICATOR COLLAR	DR BRASS	AS1567 -352
13	INDICATOR ARM	DR BRASS	AS1567 -352
12	HANDWHEEL NUT	BRASS	
11	NAMEPLATE		
10	HANDWHEEL	ZINC ALUM BRONZE	AS1874 AS1565
9	SPINDLE	DR BRASS	AS1567 -352
6/7/8	STUD BOLT - NUT - WASHERS	M. STEEL ZP	2 SETS
5	GLAND	DR BRASS	AS1567 -352
4	GLAND PACKING	PTFE GPI BUSH	AS1198
3	COVER - BONNET	GUNMETAL BRONZE	AS1565 C83600M
2	WEDGE - GATE	GUNMETAL BRONZE	AS1565 C83600M
1	BODY	GUNMETAL BRONZE	AS1565 C83600M

PVA PROMET VALVES AUSTRALIA
1A Green Road Woodville West SA 5011
www.prometvalves.com promet@prometvalves.com
T: 08 8268 1777 ABN 47096 425 697 F: 08 8268 1711

FIG No **T159** BRONZE GATE VALVE
SCREWED - OS&Y CLASS 35
PN 40