



- Options:**
- Bronze Handwheels ①
  - Open-Shut Indicators ②
  - Locking Devices ③

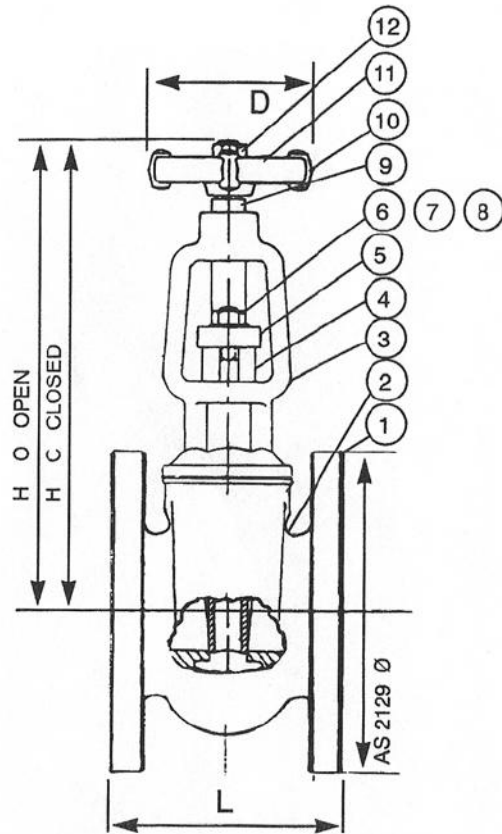

**NOTE**  
Bolted Bonnet – Size 100mm

**Flanges:**

AS2129 Table 'F' & ('H')

④ Available: ANSI • JIS • DIN

**Dimensions**

Size mm	8	10	15	20	25	32	40	50	65	80	100
L	•	•	70	74	89	102	117	143	156	172	210
H %	•	•	138 / 155	152 / 175	175 / 203	200 / 238	224 / 263	264 / 319	324 / 400	365 / 444	450 / 559
D	•	•	65	65	90	90	90	120	150	150	190
Wt/kgs	•	•	2.2	2.5	3.6	5.0	6.3	10.5	15.0	20.0	40.0

**Pressures: 2100 kPa CWP**  
Maximum Working Pressure @ 100°C

**Standards:**  
AS 1628 – 1994: Copper Alloy Valves  
AS 3855: Materials to suit Potable Water Service

ITEM	DESCRIPTION	MAT'L	STANDARD
15	NUT	M. STEEL ZP	8 PCS
14	GASKET	NEO CORK	
13	STUD BOLT	M. STEEL ZP	8 PCS
12	HANDWHEEL NUT	BRASS	
11	NAMEPLATE		
10	HANDWHEEL	ZINC ALUM BRONZE	AS1874 AS1565
9	SPINDLE	DR BRASS	AS1567 -352
6/7/8	STUD BOLT - SWASHER - NUT	M. STEEL ZP	2 PCS
5	GLAND	GUNMETAL BRONZE	AS1567 C83600M
4	GLAND PACKING	PTFE GPI BUSH	AS1198
3	COVER - YOKE BONNET	GUNMETAL BRONZE	AS1565 C83600M
2	WEDGE - GATE	GUNMETAL BRONZE	AS1565 C83600M
1	BODY	GUNMETAL BRONZE	AS1565 C83600M



**PROMET VALVES AUSTRALIA**

1A Green Road Woodville West SA 5011  
www.prometvalves.com promet@prometvalves.com  
T: 08 8268 1777 ABN 47096 425 697 F: 08 8268 1711

FIG No **T160** BRONZE GATE VALVE  
FLANGED-OS&Y CLASS 21  
PN 20