Z204 L/R

BRONZE 90° GLOBE VALVE

Outside Screw - Rising Stem - Replaceable Bronze Trim

An AS 2129 E flanged, Cast Bronze Globe Valve, Screw Down Screw Lift, 90° Angle Pattern Outside Screw, Bolted Cover, Cast Integral Bridge, Rising Stem, Replaceable Bronze Seat & Disc.

PRESSURE/TEMPERATURE RATING


Steam up to 700KPA (100PSI)
Max Service Temp 170°C (338°F)
Water, Oil or Gas up to 1400KPA (200PSI)

OPTIONS

Open and Shut Indicator.

Valves manufactured in other flange and material specifications on request.

Also available as a Stop-Check Valve Screw Down Non Return (SDNR).

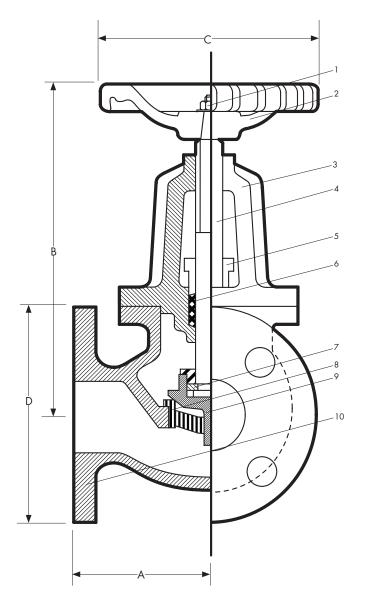

DIMENSIONS - mm				
Size	40	50	65	
Α	94	108	118	
В	250	260	320	
С	127	150	175	
D	135	150	165	

Dimensions for larger sizes are available on request.

MATERIAL SPECIFICATIONS				
REF	Component	Material	AS or BS Specification	
1	Handwheel Nut	Stainless Steel	316 S/S	
2	Handwheel	Cast Iron	AS 1830	
3	Cover	Cast Bronze LG2	AS 1565-C83600	
4	Spindle	DR. Brass	AS 1567-352	
5	Gland	Cast Bronze LG2	AS 1565-C83600	
6	Gland Packing	PTFE	Klinger K10	
7	Collet	DR. Brass	AS 1567-352	
8	Seat	Cast Bronze LG2	AS 1565-C83600	
9	Disc	Cast Bronze LG2	AS 1565-C83600	
10	Body	Cast Bronze LG2	AS 1565-C83600	

Document Version | April 2014